Artemide

PRODUCT DATA SHEET

Tolomeo micro tavolo - Led Aluminium



DESIGN BY:

Michele De Lucchi, Giancarlo Fassina 2010

MATERIALS:

Polished aluminium, matt anodised aluminium

DESCRIPTION:

Tolomeo micro tavolo - Led

Polished aluminium, matt anodised aluminium

Aluminium

A011900 Aluminium

Design

inch 17.7 inch 14.6

inch 6.7

inch 28.7

inch 27.2 N/D

N/D

9 W 24 V Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light fl ow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminum; joints and supports in polished aluminium. System of spring balancing. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two indipendent lamp units to be fitted.

SELECT LED Base Aluminium PRODUCT CODE A011900 Light emission



TECHNICAL DATA SHEET

FEATURES

Product name:

Article Code: Colour: Material:

Series:

DIMENSIONS


Length: Height: Base Diameter: Max Extension Height: Max Extension Length: Impact Resistance: Glow Wire Test:

LAMPS INCLUDED

| LED | Category: | LED |
|-----|------------------------|--------|
| U | Watt: | 9,6 W |
| | Luminous Flux (Im): | 350 lm |
| | Number: | 1 x 1 |
| | Typology: | 1 |
| | Color temperature (K): | 3000 K |
| | Class: | A |
| | | |

LUMINAIR

| Watt: | | |
|----------|--|--|
| Voltage: | | |








DIAGRAMS

Polar curve

×

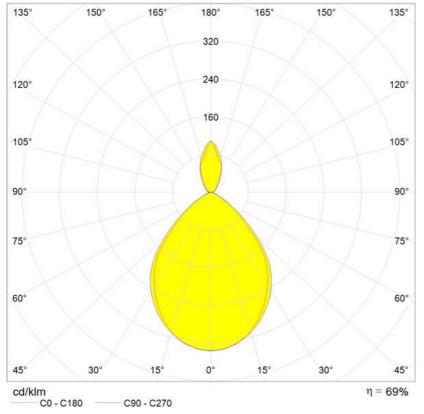

C90 - C270

Cartesian diagram

